


SPEICHEN mit Nippel in glatter Ausführung

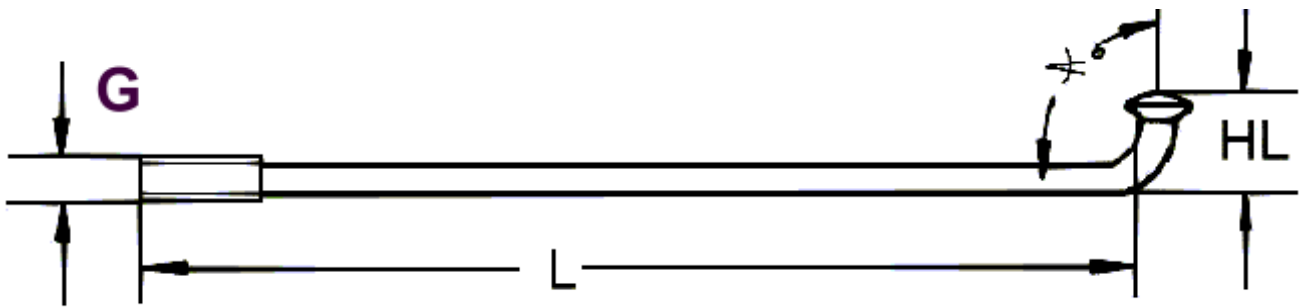

Artikel Nr.	Nippel	G	L mm	HL mm	Winkel Grad	roh €/Stk	cr €/Stk	ni €/Stk	va €/Stk
201	Messing	M 2	30 – 120 120 – 300	7	95°		1,44 1,24	1,54 1,34	0,93 0,73
231	Messing	M 2,34	30 – 120 120 – 300	8	95°		1,36 1,16	1,46 1,26	1,11 0,91
301	Messing	M 3	30 – 120 120 – 300	8,5	95°		1,43 1,23	1,53 1,33	
			30 – 120 120 – 300	gerade		1,33 1,13			1,28 1,08
			30 – 120 120 – 300	> 7	> 70°	1,33 1,13			1,28 1,08
351	Messing	M 3,5	30 – 120 120 – 260	9-14	80°/95°		1,49 1,29	1,59 1,39	
			30 – 120 120 – 260	gerade		1,39 1,19			1,35 1,15
			30 – 120 120 – 300	> 8	> 70°	1,39 1,19			1,35 1,15
401	Stahl	M 4 Nase	30 – 120 120 – 220	gerade			1,61 1,41		1,35 1,15
401	Stahl	M 4	30 – 120 120 – 260	9,5-14	80°/95°		1,61 1,41	1,71 1,51	
			30 – 120 120 – 260	gerade		1,51 1,31	1,61 1,41	1,71 1,51	1,35 1,15
			30 – 120 120 – 300	> 10	> 70°	1,51 1,31			1,35 1,15
451	Stahl	M 4,5	30 – 120 120 – 260	11-16	80°/95°		1,82 1,62	1,92 1,72	
			30 – 120 120 – 260	gerade		1,72 1,52	1,82 1,62	1,92 1,72	1,58 1,38
			30 – 120 120 – 260	> 10	> 70°	1,72 1,52			1,58 1,38
501	Stahl	M 5	30 – 120 120 – 260	12-18	80°/95°		2,12 1,92	2,22 2,02	
			30 – 120 120 – 260	gerade		2,02 1,82	2,12 1,92	2,22 2,02	2,16 1,96
			30 – 120 120 – 260	> 11	> 70°	2,02 1,82			2,16 1,96