


SPEICHEN mit Nippel in ED Ausführung

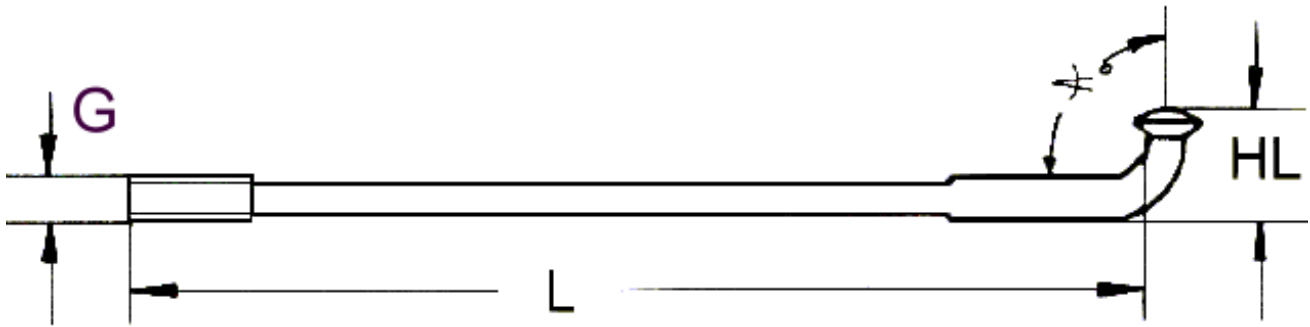

Artikel Nr.	Nippel	G	L mm	HL mm	Winkel Grad	roh €/Stk	cr €/Stk	ni €/Stk	va €/Stk
202	Messing	M 2 ED 2,34x2	50 – 120 120 – 300	7	95°	auf Anfrage			
232	Messing	M 2,34 ED 3x2,34	50 – 120 120 – 270	8	95°		1,56 1,36		
302	Messing	M 3 ED	50 – 120 120 – 270	9,5	95°	1,50 1,30	1,60 1,40	1,70 1,50	
			50 – 120 120 – 270	gerade				1,70 1,50	
			50 – 120 120 – 270	> 8	> 70°	1,50 1,30			
352	Messing	M 3,5 ED	50 – 120 120 – 260	10-14	80°/95°		1,71 1,51	1,81 1,61	
			50 – 120 120 – 260	gerade		1,61 1,41		1,81 1,61	1,91 1,71
			50 – 120 120 – 300	> 9	> 70°	1,61 1,41			1,91 1,71
352	Messing	M 3,5 ED Nase	50 – 120 120 – 260	gerade			1,71 1,51	1,81 1,61	1,91 1,71
402	Stahl	M 4 ED	50 – 120 120 – 260	10-17	80°/95°		1,90 1,70	2,00 1,80	
			50 – 120 120 – 260	gerade		1,80 1,60	1,90 1,70	2,00 1,80	1,98 1,78
			50 – 120 120 – 300	> 10	> 70°	1,80 1,60			1,98 1,78
452	Stahl	M 4,5 ED	50 – 120 120 – 260	12-17	80°/95°		2,33 2,13	2,43 2,23	
			50 – 120 120 – 260	gerade		2,23 2,03	2,33 2,13	2,43 2,23	2,29 2,09
			50 – 120 120 – 300	> 11	> 70°	2,23 2,03			2,29 2,09
502	Stahl	M 5 ED	50 – 120 120 – 260	12-17	80°/95°		2,87 2,67		
			50 – 120 120 – 260	gerade		2,77 2,57	2,87 2,67	2,97 2,77	2,77 2,57
			50 – 120 120 – 300	> 12	> 70°	2,77 2,57			2,77 2,57